


# Hy8Relay™

## Add 8 User Relays to your HySecurity Operator

The customized Hy8Relay™ module provides 8 additional user relays for integration with HySecurity's intelligent Smart Touch and Smart DC Controllers. Simple installation and direct communication expands the number of user relay functions available for all Smart Touch and Smart DC controllers with up-to-date software.

### Smart and Flexible

- For use with *all* HySecurity Operators
- Provides 8 additional user relays
- Integrated with Smart Touch and Smart DC controllers using V2.95 or current S.T.A.R.T. (Smart Touch Analyze & Retrieve Tool)
- Wiring harness - 4 wires; 2 to Dual Gate A & B; 2 to RS-485
- Two models - SDC - MX3307-01 and STC - MX3307-02

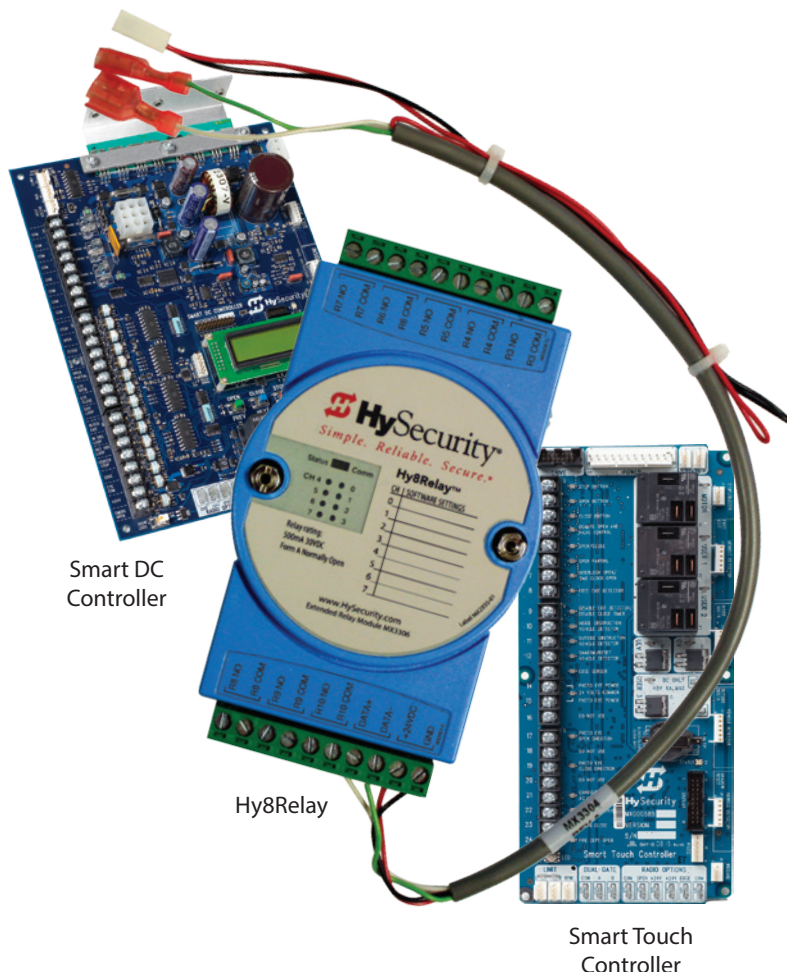

### SPECIFICATIONS

#### Relay Output

Channel:

8 Form A

Contact Rating:

AC: .5A @ 120VAC, .25A @ 240VAC

DC: 1A @ 30VDC

#### Power

Power Consumption:

1.8W @ 24VDC

Certifications:

CE, FCC, Class A, UL

